


# LP1-SS LOW PRESSURE ALL STAINLESS

Capsule type pressure gauge for accurate measurement of low pressures  
Suitable for air, water, oil, gas or any other media not corrosive to stainless steel

## SPECIFICATIONS

<b>Dial</b>	2 ½" (63 mm), 4" (100 mm)
<b>Case</b>	Stainless steel, dry non-fillable
<b>Wetted Parts</b>	316 stainless steel
<b>Bezel</b>	Removable, stainless steel
<b>Lens</b>	Heavy duty glass
<b>Pointer</b>	Adjustable, black aluminum Adjustment screw on dial face
<b>Connection</b>	Lower mount ¼" NPT for 2 ½" & 4" dial ½" NPT for 4"
<b>Scale</b>	Standard: single scale inches of water column or psi
<b>Accuracy</b>	2-1-2% of span 2 ½" & 4" ASME B40.1 Grade A
<b>Ambient Temp</b>	-30° F to 180° F

*Design meets or exceeds ASME B40.100 pressure gauge standard.*

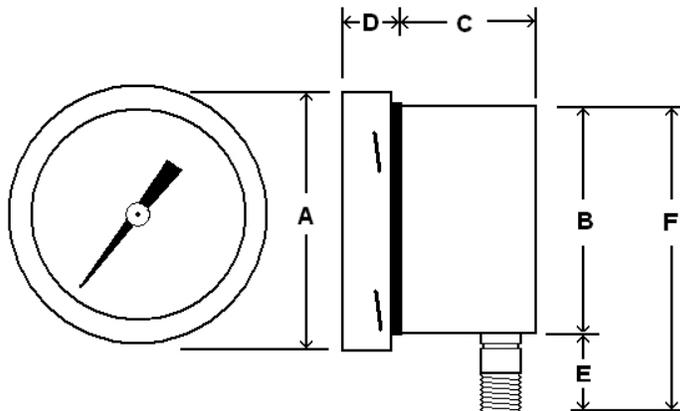

Dial	Unit	A	B	C	D	Conn.	E	F
2 ½"	In.	2.95"	2.55"	1.23"	0.58"	¼" NPT	1.00"	3.55"
	mm	75	65	31	15		25	90
4"	In.	4.38"	3.87"	1.27"	0.64"	¼" NPT	1.42"	5.30"
	mm	111	99	32.3	17		36	135

## AVAILABLE OPTIONS\*

- Certificate of Accuracy, NIST Traceable
- Custom Dial
- Special Connection Size
- Other Lens Material
- Cleaned for Oxygen Service
- Protective Rubber Cover, see page 79
- Dual Scale

\*Lead times/minimums may apply

## APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
2 ½"	0.55 lbs (0.26 kg)	upon request
4"	0.95 lbs (0.44 kg)	upon request